

Dream Home

BELLAWOOD PLATINUM

Premium Underlayment



ENHANCED PERFORMANCE FOR
PAD ATTACHED FLOORING



Water Protection



Compression Resistant



Sound Reduction



Insulating Value



Environmentally Friendly



Anti-Microbial Treated Fibers



Perfect For Pad Attached Flooring

When performance matters use
Bellawood Platinum
underlayment.

Bellawood Platinum's aluminum infused film and dense recycled fibers combine to create the best performing underlayment in the industry with unmatched water protection, superior sound absorption, and even, uninterrupted, support for your floors.

Bellawood Platinum works best with:

- Floating Laminate, Wood & Bamboo
- Glue-down or Nail-down Solid & Engineered Wood or Bamboo Flooring

**POWERFUL PROTECTION TO
KEEP YOUR FLOORING
LOOKING BETTER, LONGER!**

PROUDLY

Made in the U.S.A.



SCAN the code for demos
& downloadable specifications



RATED RESIDENTIAL AND COMMERCIAL



LL Flooring®


BELLAWOOD PLATINUM

Features & Specifications

The secret's in the SILVER!

Bellawood Platinum's unique silver barrier provides unmatched bulk moisture defense.

Combined with its thick, dense, antimicrobial fiber pad, **Bellawood Platinum's** unique vapor barrier becomes part of a powerful water management system that aggressively grabs bulk moisture and moves it to areas where it can escape without affecting the floor above!

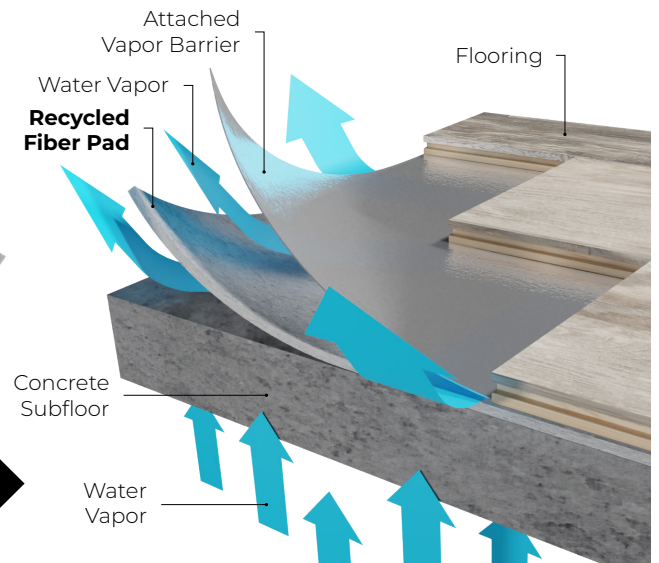

SUPERIOR SOUND ABSORPTION

Bellawood Platinum's dense, patented fiber construction absorbs and controls both impact and ambient sound to create a comfortable living space for everyone!



(STC)
8" concrete with ceiling assembly

66

AMBIENT SOUND
The higher the STC number, the better the noise control!



(IIC)
IIC Δ Delta: 22
8" concrete with ceiling assembly

71

IMPACT SOUND
The higher the IIC number, the better the noise control!



SMOOTHS MINOR SUB-FLOOR IMPERFECTIONS

Bellawood Platinum's dense fibers evenly support the floor above while flexing around sub-floor surface roughness below, reducing the risk of laminate panels "rocking" or laying unevenly.



ADDS INSULATION VALUE

Bellawood Platinum helps house insulation by adding an **R-Value of .53** to a floor system!



INSTALLATION METHODS

Bellawood Platinum's versatile construction allows it to be installed in **floating, nail down & glue down** applications!



APPROVED FOR USE WITH INFLOOR HEATING SYSTEMS



TECHNICAL DATA

- **Materials:** Blended synthetic and natural fibers
- **Lip & Tape Included:** Yes
- **Antimicrobial Protection:** Yes
- **Weight:** 23oz/yd² (2.56oz/ft²)
- **Thickness:** 0.10"
- **Density:** 19.17lbs/ft³
- **Compression Set @ 25%:** 18.8%
- **Compression Resistance @ 50%:** 219.6 psi
- **R-Value (@ 0.125"):** 0.53hr-ft²-degF/Btu (0.136 inch)
- **WVTR:** 0.093lbs/1000ft²/24hrs
- **Moisture Emissions Allowance:** 10lbs/1000ft²/24hrs
- **Approved Subfloors:** All properly prepared concrete and wood materials



ECO FRIENDLY

Bellawood Platinum contains 94% post industrial/pre-consumer fibers. Bellawood Platinum may satisfy LEED™ and may contribute to MRc4.1-4.2 and EQc4.3 (Low-Emitting Materials).



Bellawood Platinum is both GREENGUARD and GREENGUARD GOLD certified for low emissions, conforming to Indoor Air Quality standards and Collaborative for High Performance Schools (CHPS) - CA Section 01350.



SCAN the code for demos & downloadable specifications

RATED RESIDENTIAL AND COMMERCIAL